



HW60

Dimensions (mm)	External	Internal
Height	1850	
Width	775	
Depth	750	
Capacity (ltr)		
Gross		533
Net		475



HS60

Dimensions (mm)	External	Internal
Height	1850	
Width	775	
Depth	750	
Capacity (ltr)		
Gross		533
Net		475



LW60

Dimensions (mm)	External	Internal
Height	1850	
Width	775	
Depth	750	
Capacity (ltr)		
Gross		550
Net		409



LS60

Dimensions (mm)	External	Internal
Height	1850	
Width	775	
Depth	750	
Capacity (ltr)		
Gross		550
Net		409

Features

- White laminated / stainless steel exterior
- White aluminium interior
- Reversible door
- Lock fitted as standard
- 4 adjustable shelves
- Replaceable door gasket
- Rollers to rear, adjustable feet to the front

Additional Extras


- V2-SHELF60L - Large shelf for HW/HS60
- V2-SHELF60S - Small shelf for HW/HS60
- V2-GASKET60 - Gasket for HW/HS/LW/LS60
- V2-CASTORKIT6 - Castor kit




Technical Specification

	HW60	HS60	LW60	LS60
Temperature Range	+2°C ~ +10°C	+2°C ~ +10°C	-10°C ~ -20°C	-10°C ~ -20°C
Climate Class	4	4	4	4
Power Supply	13amp	13amp	13amp	13amp
Cooling	Ventilated	Ventilated	Static	Static
Defrost	Automatic	Automatic	Manual	Manual
Refrigerant	R290	R290	R290	R290
Energy Efficiency Class	C	C	B	B
Energy Consumption (kw/24hrs)	1.33	1.33	2.45	2.45
Power Usage (w)	160	160	220	220
Weight (kg)	99	99	103	103


HW60

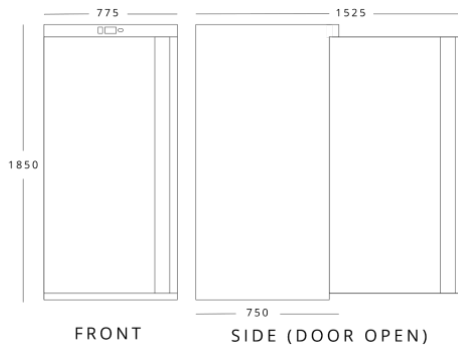

HS60

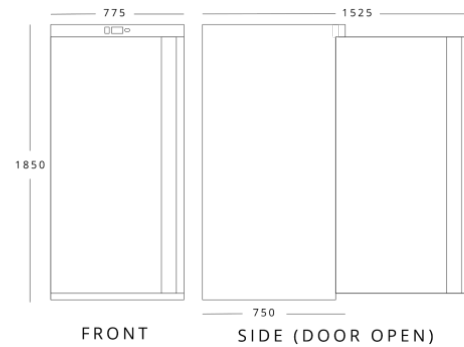

LW60

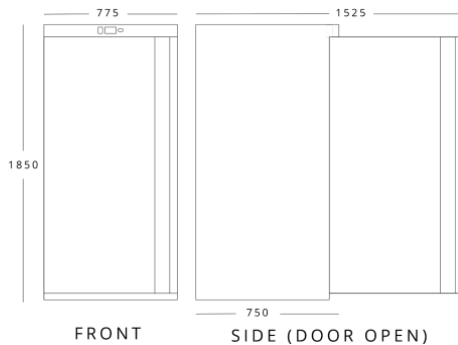

LS60

